



NOTES1:

UL Standard

1. Rated voltage/current : 150V / 10A
2. Withstanding voltage : AC1300V/1Min.

IEC Standard





1. Pollution degree	2
Overvoltage category	III
Rate impulse voltage(KV)	4KV
Rate voltage(V)	400V
Rate current(A)	32A

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 3.50mm, Poles : N=04~48P
3. Operating temperature: -40°C~+105°C
4. Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm						-	∩	∇
TO	Over	Over	Over	Over	Over	Over	0.1/10			
6	6 TO 10	10 TO 24	30 TO 30	30 TO 60	60 TO 100	100 TO 150	<			
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'		

5. RoHS Compliance

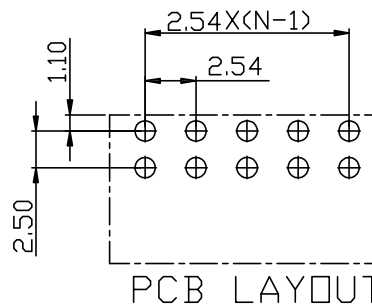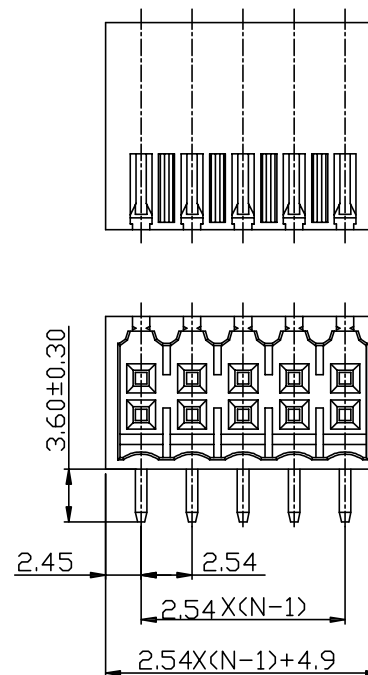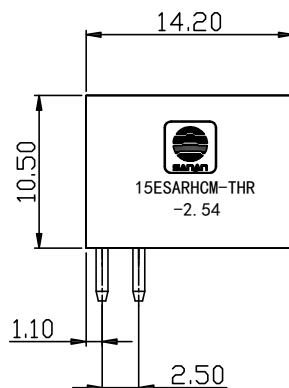

MATERIAL:		SURFACE:	
MAT NO.:		宁波三安电子科技有限公司 Sanan Electrical Technology Co. Ltd	
STATUS:			
APPD:		NAME:	
CHKD:		15ESARHCM-THR-2.54-20P	
DRFT:		DRAWING NO.:	
SIZE: A4		SCALE:	
TYPE:		SHEET	
		1/1	

未注公差/General tolerances(mm)													D
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50